

# Zip Tudor

Over-sink or Under-sink Water Heaters  
5.0 litre, 10.0 litre Open Outlet to Single Point



10L over-sink model

**6 Star WELS rated taps for under-sink Tudor (sold separately)**



99075-Solo Short-spout vented mixer tap



99051-Hero Long -spout vented mixer tap



99076-Mono Tall-spout vented mixer tap

See installation instructions for full warranty details.



5L under-sink model

### Features

Delivers hot water to the sink with no lag time or water wastage

Adjustable temperature control (30-80°C)

Choice of 5 or 10 litres capacity

No need for safe waste tray

Over-sink models come supplied with spout and valve.

Under-sink models for connection to open outlet 6 Star WELS rated tapware (accessory).

Frost protection settings

**6 Star WELS rated tapware accessories for under-sink;  
Hot water to your sink with no lag time and wasted water**



## Over-sink or Under-sink Water Heaters 5.0 litre, 10.0 litre Open Outlet to Single Point

### Description

- Over-sink or under-sink water heaters for delivery of hot water to sinks or tubs.
- Vented tapware for under-sink Tudors are 6 Star WELS rated (not included).
- Full external temperature control ranging from 30°C to 80°C.
- 3 litre/minute flow rate.
- Open outlet to single point.
- Swivel arm open outlet spout and on/off valve (over-sink models).
- Frost protection setting to protect the heater when not in use.
- Low watts density spiral heating element for rapid recovery and long life.
- Manually re-settable over-temperature safety cut-out.
- External neon light indicator to indicate when element is 'ON'.
- Open outlet non-pressurised system. safety cut-out.

### Warranty

One year parts and labour warranty

### Installation

#### A. Location

All models should be wall mounted using screws and plugs provided (suit most walls). The tank should be situated as close as possible to the tap. Over-sink heaters should be installed so that the outlet spout drains to a sink or basin and with a clearance of 270 mm beneath the heater to allow for service access. Under-sink heaters should be installed as closely as possible to directly below the outlet tap within the length of the supplied tap hoses.

#### B. Electrical

To be connected to a 10amp GPO, 220V - 240V AC power supply. The water heater should be positioned on a wall within 1500mm of electrical wiring GPO.

#### C. Plumbing

To be installed by a qualified tradesperson in accordance with manufacturer's instructions and AS/NZS 3500 plumbing and AS/NZS 3350 wiring regulations.

Can be connected to a rising main or to a cistern with a minimum working head of 5 metres.

All water connections are via O12.7mm BSP compression fittings.

Over-sink models are supplied with a 300 mm open outlet spout and water control valve.

Under-sink models must be installed only with a Zip-approved open outlet tap. Over-sink and under-sink models are NOT interchangeable.


#### D. Caution

Variable temperature water heaters should be set only in strict compliance with regulations governing the temperature of stored and dispensed hot water. During heating cycle, the outlet will drip. Once heating is complete, dripping will cease.


#### E. Accessories

- 99051 - Hero mixer tap single
- 99075 - Solo mixer tap single
- 99076 - Monobloc mixer tap single
- 99132 - Solo mixer tap single disabled
- 99133 - Hero mixer tap single disabled
- 99032 - Telescopic spout

### Dimensions (see table below)

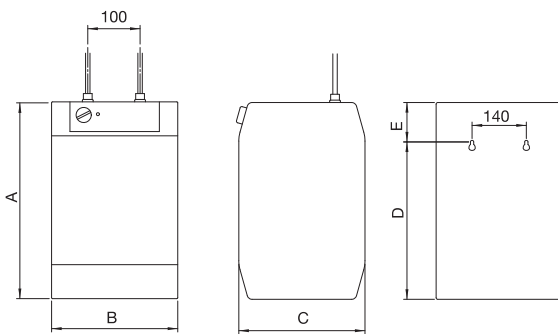

### Typical Installation over basin

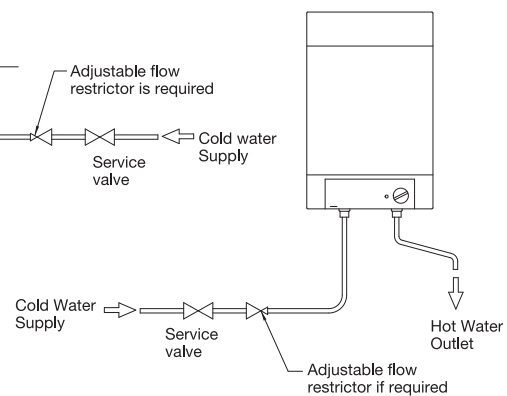

### Product Selection Chart

Product Details	New Order Codes	Dimensions (mm)				
		A	B	C	D	E
Tudor Over-sink 5.0 litre	21051	390	255	215	265	125
Tudor Under-sink 5.0 litre	21052	390	255	215	250	140
Tudor Over-sink 10.0 litre	21101	455	310	265	275	180
Tudor Under-sink 10.0 litre	21102	455	310	265	275	180

Note: 10 litre Tudors have a slightly different fascia than 5 litre models (as shown on front page).